



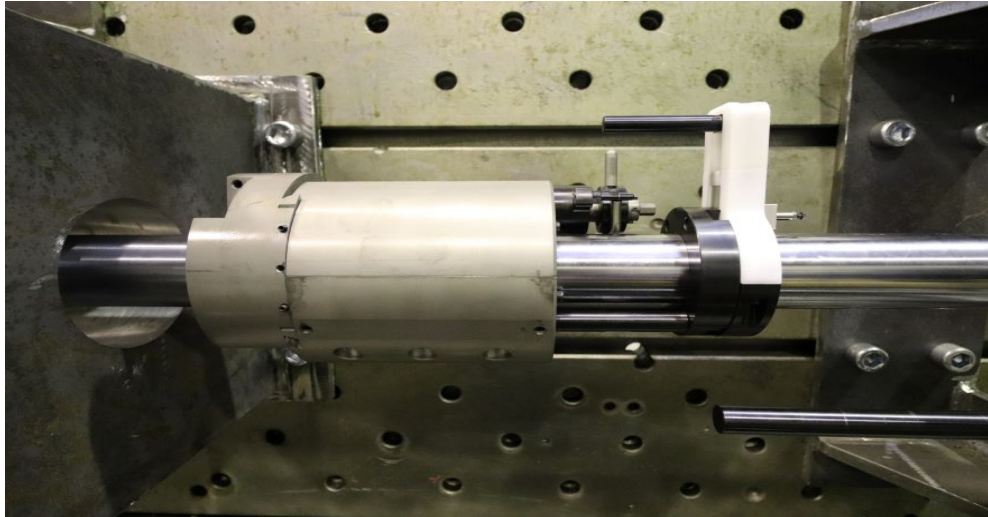


T B M F A C I N G H E A D W I T H T R I P F E E D

Our Facingheads are characterized by their compact design. The intergrated Z-axis with a travel of 150 mm until more than 400 mm make these facing heads a flexible and versatile assembly group to cover countless applications. The maximum feed rate is 0,5mm. This version has a total weight of approx. 20 kg.

TECHNICAL DETAILS & INFORMATION

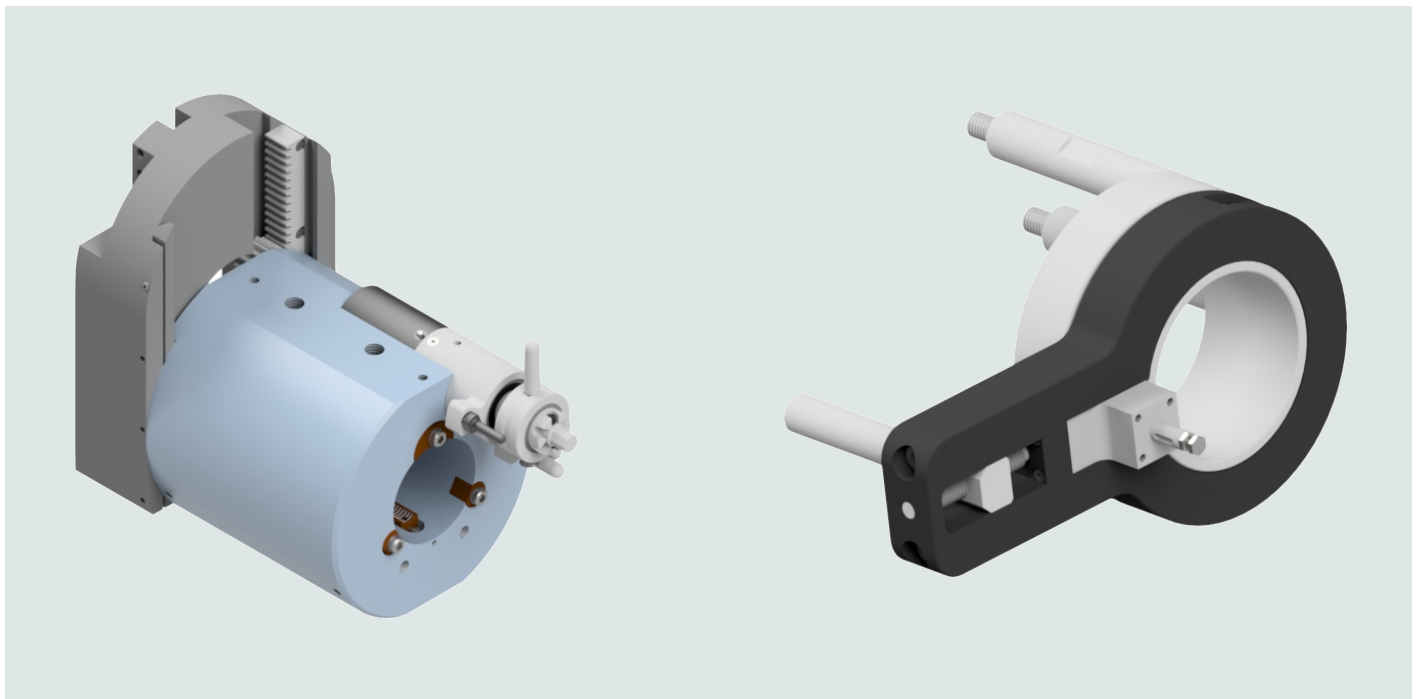

TECHNICAL DETAILS & INFORMATION

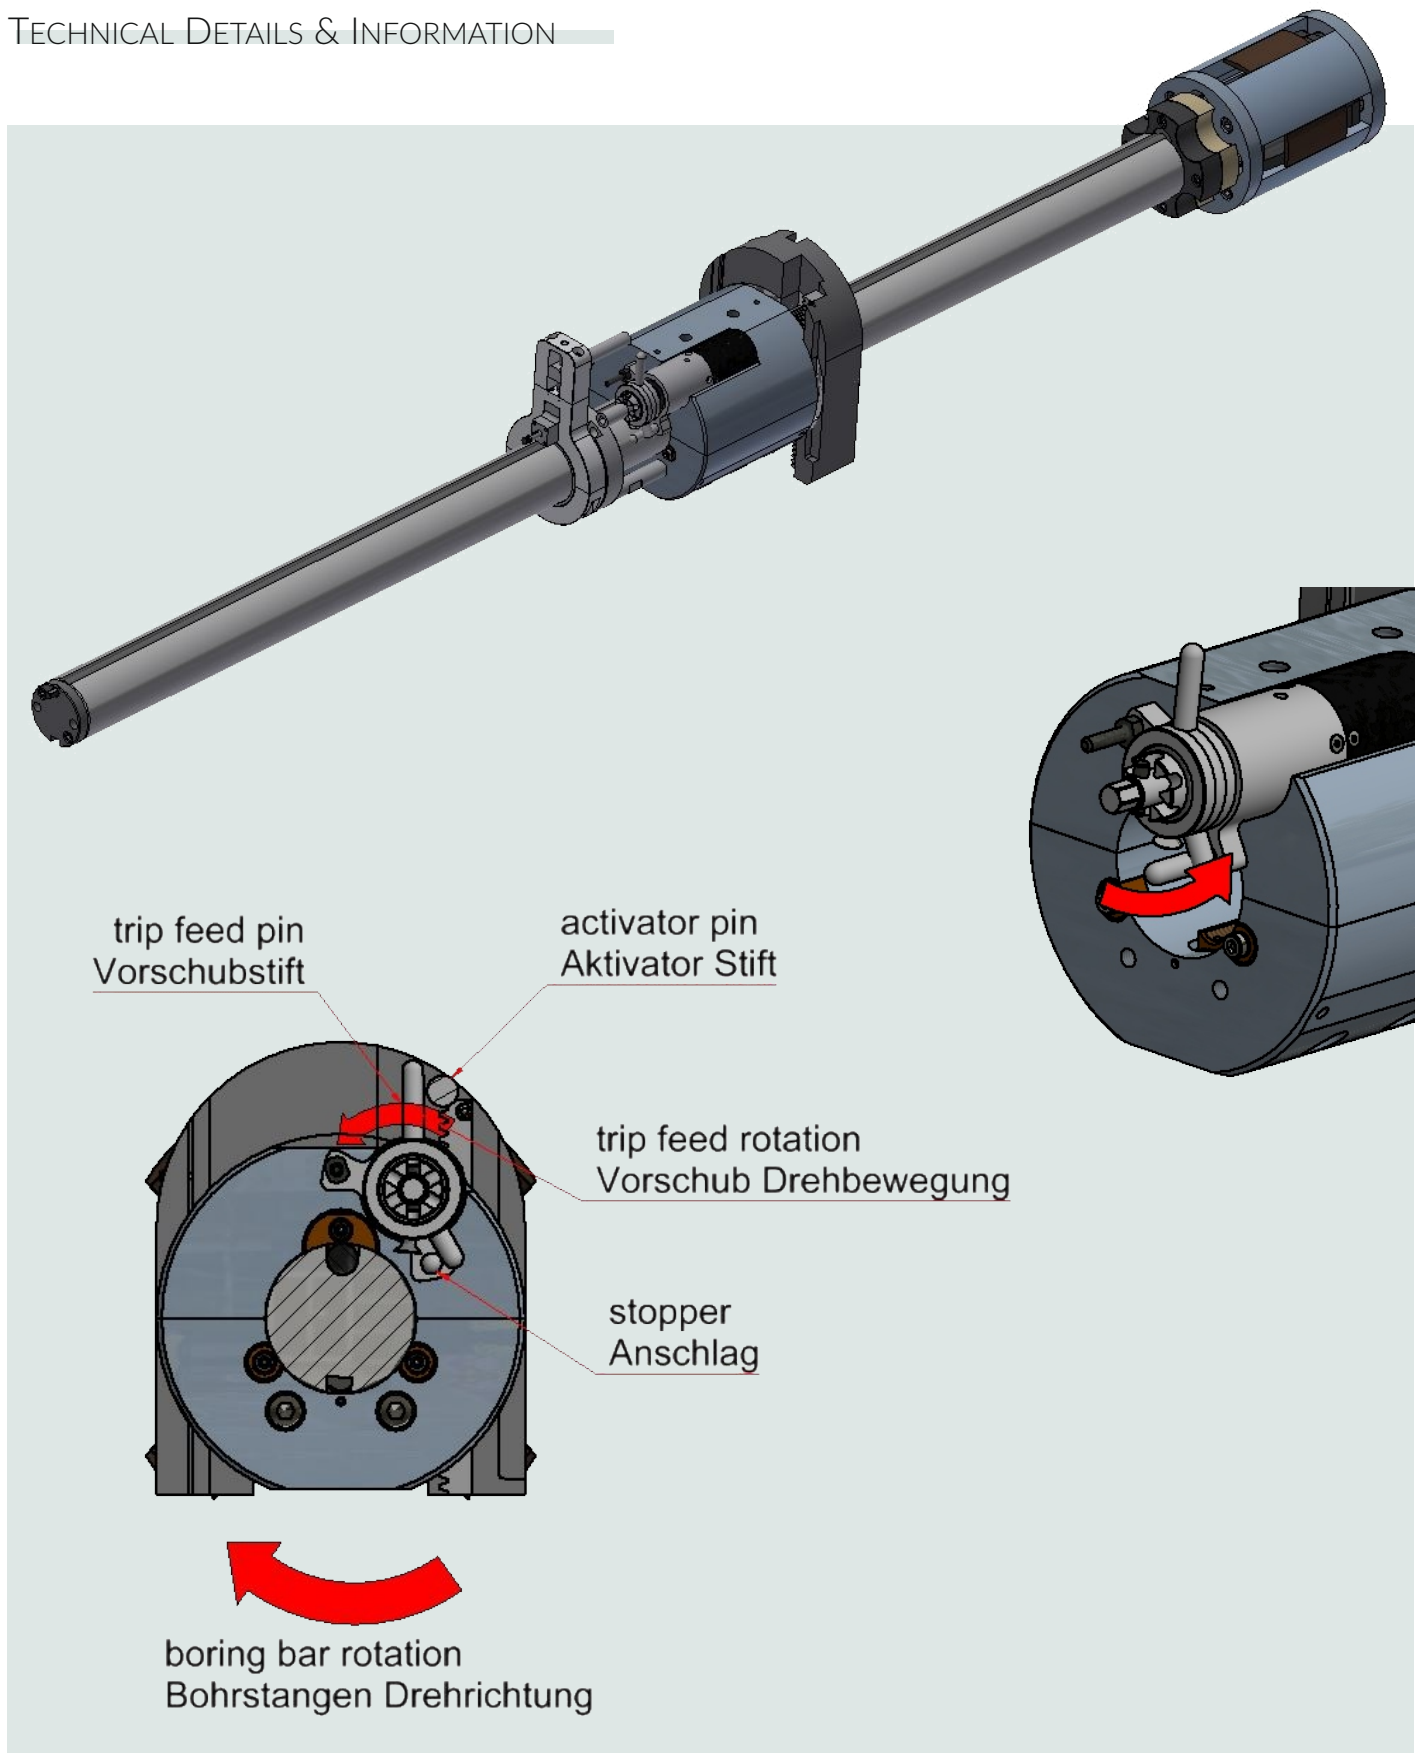

TECHNICAL DETAILS & INFORMATION

